

Straight Blade Devices

2 Pole, 3 Wire Grounding

15 and 20 Ampere, 125 Volts

Heavy Duty, Specification Grade and Hospital Grade
Duplex and Single Receptacles



Heavy Duty, Specification Grade, Duplex Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws.	Brown	HBL5262	HBL5362
	Ivory	HBL5262I	HBL5362I
	Gray	HBL5262GY	HBL5362GY
	Red	HBL5262R	HBL5362R
	White	HBL5262W	HBL5362W
	Black	HBL5262BK	HBL5362BK
Corrosion resistant.	Yellow	HBL52CM62	HBL53CM62
	Ivory	HBL52CM62I	—
On 4" (101.6) round cover.	Brown	HBL5282	—
Isolated ground. ⁽¹⁾	Orange	IG5262	IG5362
	Ivory	IG5262I	IG5362I
	Gray	IG5262GY	IG5362GY
	White	—	IG5362W
	Red	IG5262R	IG5362R

Heavy Duty, Hospital Grade, Duplex Receptacles

Description	Color	Catalog Numbers	
Flush, thermoplastic polyester face, back and side wired, multiple drive screws.	Brown	HBL8200	HBL8300
	Ivory	HBL8200I	HBL8300I
	Gray	HBL8200GY	HBL8300GY
	Red	HBL8200R	HBL8300R
	White	HBL8200W	HBL8300W

Heavy Duty, Specification Grade, Single Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws.	Brown	HBL5261	HBL5361
	Ivory	HBL5261I	HBL5361I
	Gray	—	HBL5361GRY

Special Purpose Single Receptacles






Description	Color	Catalog Numbers	
Corrosion resistant.	Yellow	HBL52CM61	HBL53CM61
Isolated ground. ⁽¹⁾	Orange	IG5261	IG5361
Panel mount on 1.94" (49.3) centers.	Brown	HBL5284	HBL5357

Heavy Duty, Hospital Grade, Single Receptacles

Description	Color	Catalog Numbers	
Flush, nylon face, back and side wired, multiple drive screws. ⁽²⁾	Brown	HBL8210	HBL8310
	Ivory	HBL8210I	HBL8310I
	Gray	HBL8210GY	HBL8310GY
	Red	HBL8210R	HBL8310R
	White	HBL8210W	HBL8310W
Isolated ground. ⁽¹⁾	Orange	IG8210	IG8310
Panel mount on 1.94" (49.3) centers.	Brown	HBL8284	—
	Ivory	HBL8284I	HBL8384I

Notes: ⁽¹⁾See Section J for full line of isolated ground devices.

⁽²⁾See Section I for full line of hospital grade devices.



Straight Blade Receptacles

Duplex Receptacles*Features and Benefits*

Heavy duty wrap around bridge locked into body.

Thick wall thermoset base.


.032" thick brass triple wipe power contacts.

Eight hole clamp type back wiring.


Brass center rivet.

All brass grounding system.

Impact resistant nylon face.

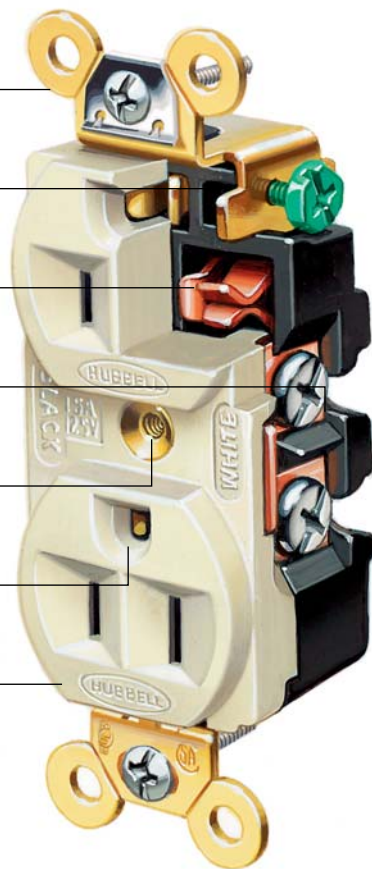**Value Engineered Design**

The Hubbell HBL5252 Series. Equal to or better than all competitors' imitation of Hubbell's HBL5262. Available in a side wire only version (HBL5242 series). Our concern for quality, safety and innovative design isn't restricted to the top of our product line. Every device in our catalog is built to uncompromising standards, no matter what the catalog number is. You can benefit from the performance features of an industrial receptacle at a fraction of the price of other 5262s.



Pretensioned ground contact feature allows for easy insertion and removal of ground blades without sacrificing superior ground blade retention.



Compact heavy duty design provides users with a superior device which fits into narrow "cut-in" or handy boxes.



Heavy duty triple wipe bronze contacts deliver reliable uninterrupted power supply. Material has superior spring properties. Contact assembly includes large #8 brass screws.



Patented anchor hole and wire restraint feature. Anchor hole helps form solid wire around terminal screw. Wire restraint feature provides strain relief when pushing receptacle into the wall box (HBL5242/HBL5342 series).